


Interface to connect up to 2 pcs MXN camera (with or without motorized shutter) at Orlaco monitor with 4-pin DIN connector.



Orlaco monitor with 4-pin DIN connector

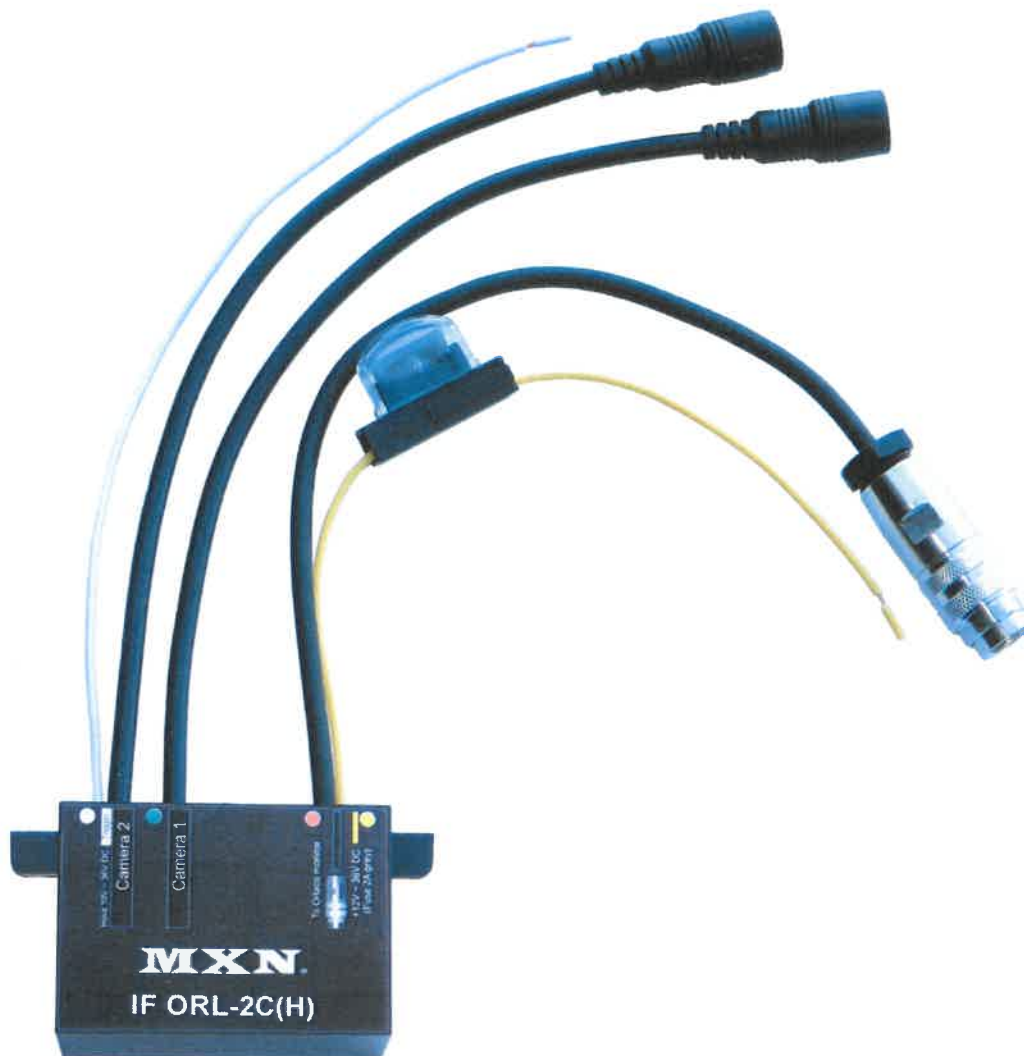

- 1 pce Shutter memory, 12V ~ 36V DC
- 1 pce Trigger IN, 10V ~36V DC
- Status LEDs (for camera power, trigger & shutter power status)
- External 2A fuse